

n-type

TECHNOLOGY
INSIDE

455 W 22.77 %

Maximum power

Maximum efficiency

KEY BENEFITS AND FEATURES



Power from **440 to 455 Watt**



96 G12R HC **n-type** half-cut cells



The **new standard** in photovoltaic technology



High efficiency and enhanced low light performance



Excellent temperature coefficient **-0.29%/°C**



1762 x 1134 x 30 mm

Performance guarantee


- **25-years** performance warranty with max power decrease from 2nd year **0.4%/year**
- **99%** at the end of first year
- **91.4%** at the end of 20th year
- **89.4%** at the end of 25th year

Product guarantees

- **15-year** product warranty
- Third-party product **liability** insurance
- All FuturaSun's modules are designed and guaranteed by the **Italian** headquarters

Mechanical Specifications

Dimensions	1762 x 1134 x 30 mm
Weight	21.3 kg
Glass	High transmission, Low iron, Tempered, ARC, Thickness 3.2 mm
Cells	96 monocrystalline half-cut MBB n-type cells 182 x105 mm
Frame	Black anodized aluminium frame with mounting and drainage holes
Junction boxes	Certified according to IEC 62790, IP 68 approved, 3 bypass diodes
Cables	Solar cable 4mm², length 1100 mm or customized, with connectors type Suzhou Xtong PV-XT101.2
Backsheet	Composite multilayer film - white
Maximum reverse current (Ir)	25 A
Maximum system voltage	1000 V
Mechanical load (snow)	Design load: +1600 Pa, (+2400 Pa including safety factor 1.5)
Mechanical load (wind)	Design load: -1600 Pa, (-2400 Pa including safety factor 1.5)

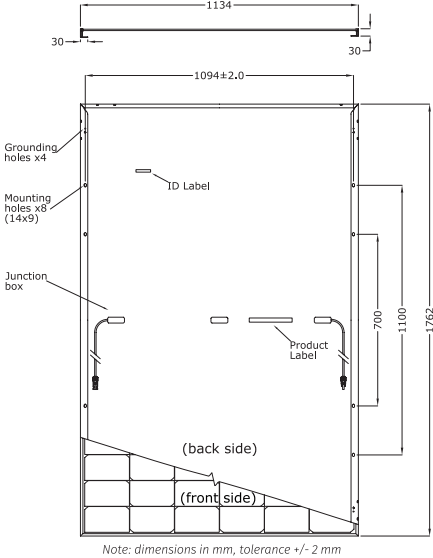

Electrical data - STC^{*}

FU440M Silk Nova FU445M Silk Nova FU450M Silk Nova FU455M Silk Nova

Sorting tolerance	W	0~+5			
Module power (Pmax)	W	440	445	450	455
Open circuit voltage (Voc)	V	35.14	35.30	35.47	35.63
Short circuit current (Isc)	A	15.85	15.91	15.97	16.02
Maximum power voltage (Vmpp)	V	29.62	29.81	30.01	30.17
Maximum power current (Impp)	A	14.86	14.93	15.00	15.08
Module efficiency	%	22.02	22.27	22.52	22.77

Electrical data - NOCT^{**}

FU440M Silk Nova FU445M Silk Nova FU450M Silk Nova FU455M Silk Nova

Module power (Pmax)	W	330.96	334.66	338.02	341.32
Open circuit voltage (Voc)	V	33.40	33.56	33.72	33.87
Short circuit current (Isc)	A	12.80	12.84	12.90	12.95
Maximum power voltage (Vmpp)	V	27.58	27.75	27.89	28.00
Maximum power current (Impp)	A	12.00	12.06	12.12	12.19

Temperature ratings

Temperature coefficient Isc	%/°C	0.045
Temperature coefficient Voc	%/°C	-0.25
Temperature coefficient Pmax	%/°C	-0.29
NOCT ^{**}	°C	45 ± 2
Operating temperature	°C	from -40 to +85
Module (T98) max	°C	70

Certifications

Factory	ISO 9001 - 14001 - 45001
Product	IEC 61215, IEC 61730, Fire ratig Class C

Packaging

Quantity / Pallet	36 pcs
Container 40' HC	936 pcs / 26 pallets

The information included in this module datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this module datasheet. Please refer to the appropriate module user guide and module product specification document for more detailed technical information regarding module performance, installation and use.

^{*}Standard Test Conditions STC: 1000 W/m² - AM 1.5 - 25 °C - tolerance: Pmax (±3%), Voc (±4%), Isc (±5%)
^{**}Nominal Operating Cell Temperature NOCT: 800 W/m² - T=45 °C - AM 1.5
Product Made in P.R.C
AUS_01